




## FMS01 FLOOR MOUNTED SPOUT

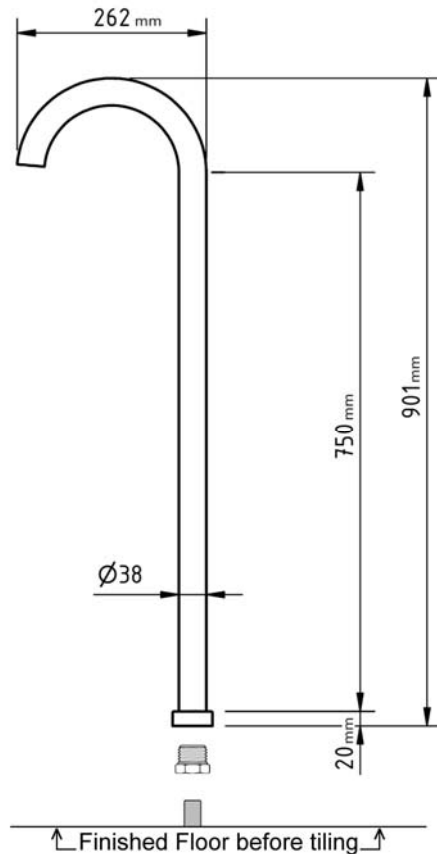

Outlet measurements are approximate only and should not be used for exact building purposes.

**Congratulations on purchasing this Quality Ewing Product.**

When handling this product take care not to damage the decorative finish.

We recommend that this product be installed by a licensed Plumber to retain the product warranty.

1. Ensure that the 15mm BSP thread is protruding a suitable distance out of the floor and is free from any damage. (Cut back if need be).
2. Apply thread seal tape to the thread which is protruding from the floor before screwing the 25mm x 15mm BSP adaptor bush on.
3. Apply thread seal tape to the 25mm BSP thread.
4. Screw the spout onto the 25mm BSP thread. Whilst screwing the spout down to the required position make sure not to apply too much pressure on the product and do not over tighten.

### **Note.**

- **All pipe work must be flushed to remove any foreign matter before installation.**
- **Maximum Operating Pressure 500Kpa**
- **Minimum Operating Pressure 150Kpa**
- **This product may not be suitable for low pressure systems**
- **Maximum Temperature for hot water 80 Degrees "C"**
- **1 Year Warranty**

### **CAUTION**

During and after use the spout may become extremely hot. Avoid touching the spout as burns may occur.

FOR AFTER SALES SERVICE IN AUSTRALIA  
PLEASE CONTACT  
TELEPHONE NUMBER: 1800 135 906  
OR  
FAX NUMBER: (07) 3889 9150