




40mm FIXED FLOOR MIXER

Congratulations for purchasing this quality Ewing mixer. Our product is manufactured to the highest quality

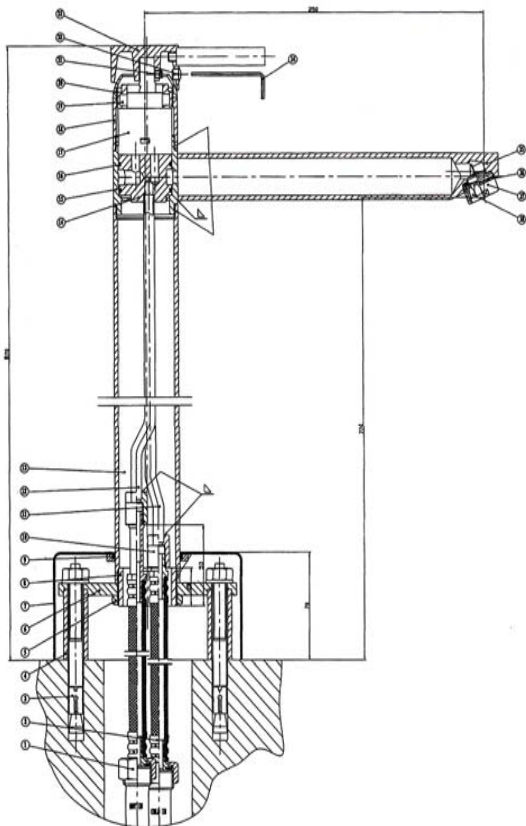

Installation Instructions.

All pipe work must be thoroughly flushed prior to installation, as foreign materials may block the flow-regulating device and reduce the flow of water.

Please follow these instructions:

1. Check that the floor mixer kit contains:
 - ◆ 1 x mixer body, 1 x Chrome cover dome,
 - ◆ 1 x brass lock nut, 1 x 3pin brass lock plate,
 - ◆ 3 x brass spacers, 2 x Stainless Steel Flex tails (hot / cold), 3 x Fixing bolts.
2. Screw the flexible hoses firmly into the underside of the mixer body.
3. Check that the ½" bsp silver soldered connections are suitably machined to suit the stainless steel tails and that the top of the connectors are at approximately at ground level.
4. Using the 3 pin lock plate as a template on the ground, centred over the pipe work, drill the holes at a size and depth to suit bolts. Insert bolts with the brass spacers on the underside of the 3 pin spacer and locate on the bolts, if all satisfactory then tighten bolts.
5. Slide the chrome cover up the mixer body then screw the main mixer body onto and down onto the 3 pin flange with the stainless steel tails protruding under the 3 pin plate. Slide the brass lock nut over the tails and lock up onto the mixer body so that the mixer spout is positioned over the correct place in relation to the bath. Tighten the brass lock nut and connect the stainless steel hoses to the hot and cold water. Ensure these hoses are tight and will not leak.
6. Remove aerator before initial water test. FLUSH THE TWO PIPELINES TO CLEAR ANY FOREIGN MATTER.
7. After full connection to water supply, lower the chrome cover dome.

IMPORTANT NOTE:

The union nuts on the hose must be connected to fittings which have machined end faces, NOT sawn off threaded tube.

We do not recommend dismantling the internal parts of the mixer. The mixers are individually factory assembled and tested to give the best performance.

For after Sales and Service in Australia
 Phone: 1800 135 906
 Fax: 07 3205 6905
 PLEASE RETAIN YOUR PROOF OF PURCHASE

Warranty.

Thank you for choosing a quality Ewing Product that is manufactured to Australian Standards Requirements. Ewing Tapware (where applicable) has been rated under the Water Efficiency Labelling Scheme (WELS), our WELS licence number is 0037.

Technical Information

- ◆ Hot and Cold water inlet pressures should be equal.
- ◆ Inlet pressure must not exceed 500kPa.
- ◆ Minimum operating pressure of 150kPa is required.
- ◆ Maximum hot water temperature 80 degrees Celsius.
- ◆ Not suitable for gravity feed systems

Terms and Conditions.

Ewing Industries undertakes to repair, or at its option replace only, any product, which is defective through faulty workmanship or materials within 12 months of the purchase of the goods. A further four years 'parts only' warranty is given on the ceramic disc cartridge

The warranty period commences from the date of purchase.

Ewing Industries reserves the right to provide components as 'parts only' to the customer. This warranty is only applicable for products purchased from an authorised Ewing Industries reseller. The labour component of the warranty does not cover excessive time taken to access or remove the product from its installed location. The warranty is limited to Ewing Industries products only and does not cover other manufactures products, which may be attached to Ewing Industries products.

Warranty may be void due to the following reasons :-

- ◆ Inability to provide proof of purchase.
- ◆ Products are not installed by a licensed plumber or in accordance with relevant industry standards or regulations.
- ◆ The product is exposed to water pressures that are greater than 500kPa and temperatures exceed 80 degrees Celsius.
- ◆ Products used for incorrect applications and in inappropriate locations.
- ◆ Products are cleaned with anything other than a soft cloth soaked with warm water. The use of abrasive cleaners or harsh detergents may void the warranty

Care and Cleaning.

Clean regularly with warm water and a soft cloth
 Do not use abrasive cleaners or harsh detergents.