




SHOWER/BATH DIVERTOR MIXER

Congratulations for purchasing this quality Ewing divertor mixer.

THE CORRECT INSTALLATION POSITION IS SHOWN IN THE DIAGRAM BELOW.

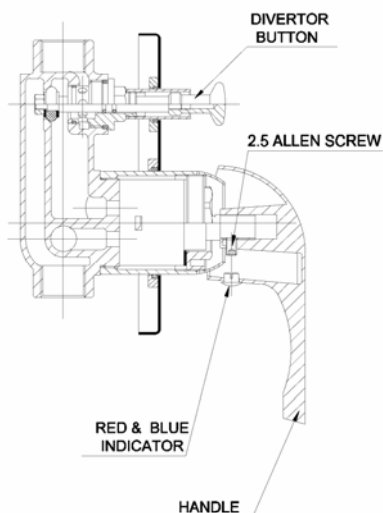

Models

- MX861 40mm Bath/Shower Divertor Mixer
- MX865 40mm ADL Bath/Shower Divertor Mixer
- MX867 35mm Bath/Shower Divertor Mixer

Installation Instructions

This divertor mixer is already factory assembled and designed for easy installation and maintenance.

Please follow these instructions:

1. **FLUSH THE PIPELINES PRIOR TO CONNECTING THE WATER INLET PIPELINES.**
2. Connect the water inlet pipes to their respective water inlet ports. Connect the shower outlet and bath outlet pipes respectively.
3. Secure the mixer to the wall ensuring the mixer inlets are **HORIZONTAL**. Cover the mixer body with plastic cover.
4. When the wall cladding is completed insert the cover plate onto the mixer body. Push the cover plate flush against the wall.
5. Ensure the inner rubber seal is fixed tightly against the mixer body to provide a watertight seal against horizontal water penetration into the wall.
6. Screw on the diverting button (smaller one with rubber seal) first, followed by the larger button.
7. Use a clear waterproof membrane sealant to seal off the perimeter of the faceplate and the wall. This will prevent vertical water penetration into the wall.
8. Put on the handle (correct position with the end pointing down) and secure with the 2.5mm Allen key (provided) in a clock-wise direction. Push on the red/blue indicator to finish it off.
9. **DO NOT PRESSURE TEST NEW INSTALLATION WITH THIS MIXER IN PLACE AS IT COULD DAMAGE THE CERAMIC CARTRIDGE**

IMPORTANT NOTE:

We do not recommend dismantling the internal parts of the shower mixer. The mixers are individually factory assembled and tested to give the best performance. **THE MIXER CAN ONLY BE USED ON MAIN PRESSURE SYSTEMS**

For after Sales and Service in Australia
Phone: 1800 135 906
Fax: 07 3205 6905
PLEASE RETAIN YOUR PROOF OF PURCHASE

Warranty.

Thank you for choosing a quality Ewing Product that is manufactured to Australian Standards Requirements. Ewing Tapware (where applicable) has been rated under the Water Efficiency Labelling Scheme (WELS), our WELS licence number is 0037.

Technical Information

- ◆ Hot and Cold water inlet pressures should be equal.
- ◆ Inlet pressure must not exceed 500kPa.
- ◆ Minimum operating pressure of 150kPa is required.
- ◆ Maximum hot water temperature 80 degrees Celsius.
- ◆ Not suitable for gravity feed systems

Terms and Conditions.

Ewing Industries undertakes to repair, or at its option replace only, any product, which is defective through faulty workmanship or materials within 12 months of the purchase of the goods. A further four years 'parts only' warranty is given on the ceramic disc cartridge

The warranty period commences from the date of purchase.

Ewing Industries reserves the right to provide components as 'parts only' to the customer. This warranty is only applicable for products purchased from an authorised Ewing Industries reseller. The labour component of the warranty does not cover excessive time taken to access or remove the product from its installed location. The warranty is limited to Ewing Industries products only and does not cover other manufactures products, which may be attached to Ewing Industries products.

Warranty may be void due to the following reasons :-

- ◆ Inability to provide proof of purchase.
- ◆ Products are not installed by a licensed plumber or in accordance with relevant industry standards or regulations.
- ◆ The product is exposed to water pressures that are greater than 500kPa and temperatures exceed 80 degrees Celsius.
- ◆ Products used for incorrect applications and in inappropriate locations.
- ◆ Products are cleaned with anything other than a soft cloth soaked with warm water. The use of abrasive cleaners or harsh detergents may void the warranty

Care and Cleaning.

Clean regularly with warm water and a soft cloth
Do not use abrasive cleaners or harsh detergents.