




SHOWER OR BATH MIXER

Congratulations for purchasing this quality Ewing mixer. This product is manufactured to the highest quality under strict quality control.

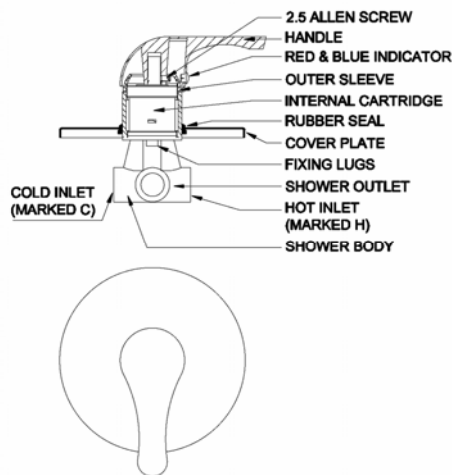

Models

MX841	40mm Bath/Shower Mixer
MX845	40mm ADL Bath/Shower Mixer
MX847	35mm Square Shower Mixer

Installation Instructions.

This quality mixer is already factory assembled and designed for easy installation and maintenance.

Please follow these instructions:

1. YOU MUST FLUSH THE PIPELINES PRIOR TO CONNECTING THE WATER INLET PIPELINES.
2. Fix the shower mixer so that the outer sleeve protrudes at least 25mm out from the finished wall with the shower outlet vertical at 90 degrees. The cold inlet is to be on the right and parallel with the hot inlet on the left.
3. Connect the shower riser to the mixer.
4. Connect the inlet pipes to the mixer.
5. After the wall is finished, push on the cover plate and rubber seal.
6. Recheck the total installation.
7. Put on the handle (correct position with the end pointing down) and secure it with the 2.5mm Allen key (provided) in a clock-wise direction then push on the red & blue indicator to finish .
8. **DO NOT PRESSURE TEST NEW INSTALLATION WITH THIS MIXER IN PLACE AS IT COULD DAMAGE THE CERAMIC CARTRIDGE**

IMPORTANT NOTE:

We do not recommend dismantling the internal parts of the shower mixer. The mixers are individually factory assembled and tested to give the best performance.

THE MIXER CAN ONLY BE USED ON MAIN PRESSURE SYSTEMS

For after Sales and Service in Australia
Phone: 1800 135 906
Fax: 07 3205 6905
PLEASE RETAIN YOUR PROOF OF PURCHASE

Warranty.

Thank you for choosing a quality Ewing Product that is manufactured to Australian Standards Requirements. Ewing Tapware (where applicable) has been rated under the Water Efficiency Labelling Scheme (WELS), our WELS licence number is 0037.

Technical Information

- ◆ Hot and Cold water inlet pressures should be equal.
- ◆ Inlet pressure must not exceed 500kPa.
- ◆ Minimum operating pressure of 150kPa is required.
- ◆ Maximum hot water temperature 80 degrees Celsius.
- ◆ Not suitable for gravity feed systems

Terms and Conditions.

Ewing Industries undertakes to repair, or at its option replace only, any product, which is defective through faulty workmanship or materials within 12 months of the purchase of the goods. A further four years 'parts only' warranty is given on the ceramic disc cartridge

The warranty period commences from the date of purchase.

Ewing Industries reserves the right to provide components as 'parts only' to the customer. This warranty is only applicable for products purchased from an authorised Ewing Industries reseller. The labour component of the warranty does not cover excessive time taken to access or remove the product from its installed location. The warranty is limited to Ewing Industries products only and does not cover other manufactures products, which may be attached to Ewing Industries products.

Warranty may be void due to the following reasons :-

- ◆ Inability to provide proof of purchase.
- ◆ Products are not installed by a licensed plumber or in accordance with relevant industry standards or regulations.
- ◆ The product is exposed to water pressures that are greater than 500kPa and temperatures exceed 80 degrees Celsius.
- ◆ Products used for incorrect applications and in inappropriate locations.
- ◆ Products are cleaned with anything other than a soft cloth soaked with warm water. The use of abrasive cleaners or harsh detergents may void the warranty

Care and Cleaning.

Clean regularly with warm water and a soft cloth
Do not use abrasive cleaners or harsh detergents.