



Flexible Hose Installation Instructions

Suitable for use with heated potable water from 1° to 80° celcius and up to 500KPa.

Ensure the water pressure system is not connected and the water pressure is under 500KPa.

Remove the hose tag during installation.

Ensure the installation date and the Plumber's Licence number is written in permanent marker on the tag supplied with the hose(s).

Once the hose is installed loop the end of the tag through the hole so the tag remains in contact with the hose.

The plumber is responsible for insuring that the installation connection is fit for the purpose, and all threads, and end seat connections are cleaned,

undamaged and free from burrs or defects and are all OK.

Firmly tighten both ends of the hose being careful not to over tighten and damage the hose.

A maximum 10Nm tightening at both ends of the hose.

Do not twist, kink, stretch or cross loop the hose.

Do not install below ground, submerged, inside walls, in ceilings, in locations where the hose may rub against any structure or other plumbing fittings or in inaccessible locations.

The hose must be installed where it can be easily visually inspected.

Do not install the hose in areas where it is subject to ultra-violet light.

Do not install hoses directly onto hot water systems.

For more detailed installation instructions, restriction of use and warranty information please contact Ewing Industries sales and service.

Warranty Information

Ewing Industries will repair or replace this product where a fault is shown to be caused by faulty manufacture or materials for a period of 5 years from the date of purchase. This warranty is subject to correct installation procedures and product use. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Notification of a claim must be received within 48 hours of a fault being detected and is subject to further laboratory tests.

No claims will be accepted where the hose has been installed incorrectly, incorrectly used, over tightened or exposed to corrosive agents.

The warranty tag must accompany the hose and contain the date of installation and the installing plumber's licence number and remain connected to the hose for a warranty claim to be valid.


Proof of purchase must accompany all warranty claims.

For all warranty claims please contact:

Ewing Industries Pty Ltd
11 Bailey Court Brendale QLD 4500
PO Box 5446 Brendale QLD 4500
Ph: (07) 3205 6099 Fax: (07) 3205 6905
Email: sales@ewingindustries.com.au

Flexible Hose Installation Instructions

For Complete Warranty Terms and Conditions Please Contact Ewing Industries




Before installation inspect hose connections to ensure that the hose has been crimped to the fitting and there is a sealing o-ring or washer.



Install hose using hand pressure not exceeding 10Nm. Always hold the fitting end when installing the hose never twist the hose.




Never use tools to install or remove hoses as this may damage the hose and the plumbing fittings.

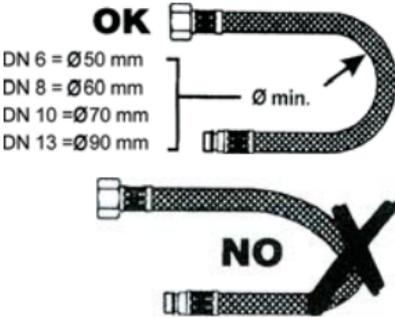

DN 6 = Ø50 mm
DN 8 = Ø60 mm
DN 10 = Ø70 mm
DN 13 = Ø90 mm

Never kink or bend the hose in a manner to distort the braid or cause the water flow to create pressure in an isolated location.

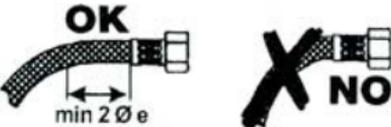

Never bend the end of the hose as this will cause pressure on the hose and the fitting attachment.



Never install a braided hose through or behind walls, in inaccessible locations or places where the hose can not be visually inspected.



Never Stretch hoses to cause any form of distortion.



Never Twist hoses to cause any form of distortion.

Never Expose Hoses To Corrosive Agents Including Aggressive Potable Water